

AIRPACK: The full pressure provider.

If high air pressure is required, the AIRPACK is the answer! It is used wherever large air volumes at high pressure are required. Its impressive power means it can supply several LEISTER air heaters in parallel. The AIRPACK delivers sufficient pressure to efficiently supply Leister blow-off nozzles.

High pressure blower

AIRPACK




Technical data AIRPACK

Design: regenerative blower


| | | | |
|--------------------------------------|-------|-------|-------|
| Frequency | Hz | 50 | 60 |
| Air flow (20 °C) | l/min | 3900 | 4500 |
| Static pressure | kPa | 30.0 | 30.0 |
| Max. ambient temperature | °C | 40 | 40 |
| Max. air inlet temperature | °C | 40 | 40 |
| Noise emission level | dB(A) | 73 | 73 |
| Environmental protection (IEC 60529) | | IP 54 | IP 54 |
| Outside diameter air inlet | Ø mm | 60 | 60 |
| Outside diameter air outlet | Ø mm | 60 | 60 |
| Weight | kg | 26 | 26 |
| Mark of conformity | | CE | CE |
| Approval mark | | Ⓢ | Ⓢ |
| Protection classe I | | ⊕ | ⊕ |

Installation dimensions in mm

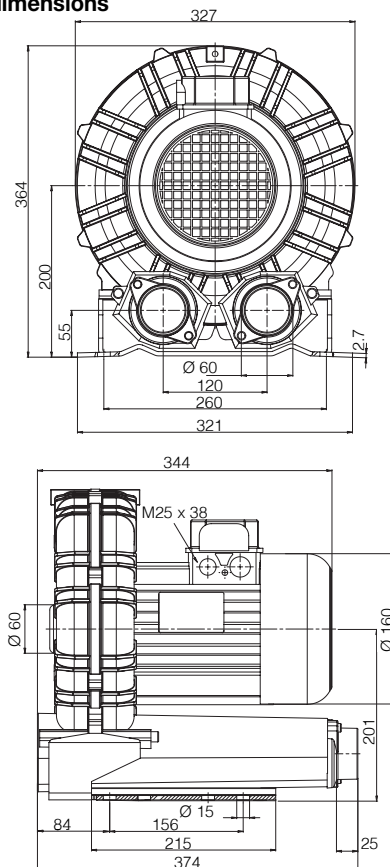

| | | |
|----------------------|------------------|----------------|
| Voltage | V~ 50Hz | 3 × 230 / 400 |
| | 60Hz | 3 × 440 – 480 |
| Power consumption | W | 2200 |
| Without cable | Order no. | 119.358 |

Additional versions available on request

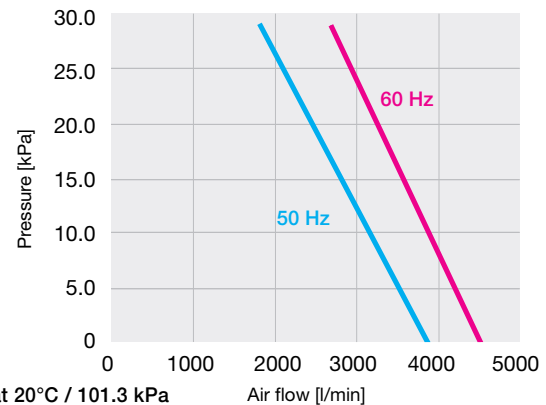

at 20°C / 101.3 kPa














Air flow [l/min]

➔ Accessories page 61










The combination of blow-off nozzles and blowers allows fast and efficient drying of beverage bottles.



Accessories ROBUST (Ø 38 mm)

| | | |
|--------------------|---|--|
| 107.350 |  | PVC air hose, Ø 19 mm |
| 107.290 |  | Hose clip for Ø 19 mm air hose |
| 107.242 |  | Closing cap Ø 19 mm attachable to hose connection adaptor 107.298 |
| 107.354 |  | Stainless steel filter push-fit on air intaker |
| 108.623 104.017 |  | Motor capacitor 230 V~ Motor capacitor 120 V~ |
| 107.298 |  | Hose connection adaptor, push-fit on ROBUST blower and adaptor 107.293 for hose connection |
| 107.281 |  | Hose connection adapter (Ø 38 mm), 3 outputs, each 14 mm |
| 107.286 |  | PVC air hose, Ø 38 mm |
| 107.287 |  | Hose clip for Ø 38 and Ø 60 mm air hose |
| 107.241 |  | Closing cap Ø 38 mm push-fit on hose connection adaptors 107.292 and 107.293 |
| 107.293 |  | Hose connection adaptor, push-fit |
| 108.755 |  | Hand operated air flow adjuster and on/off switch. Size 214 x 88 x 133 mm |
| 107.296 107.299 |  | Air flow off/on switch The air flow is interrupted on command (pneumatic 500 kPa) to the heaters. Size 214 x 88 x 133 mm |

Accessories AIRPACK (Ø 60 mm)

| | | |
|--------------------|--|--|
| 107.287 |  | Hose clip for Ø 38 and Ø 60 mm air hose |
| 107.241 |  | Closing cap Ø 38 mm push-fit on hose connection adaptors 107.292 and 107.293 |
| 107.288 |  | PVC air hose, Ø 60 mm |
| 107.240 |  | Closing cap Ø 60 mm, push-fit on hose connection adaptors 107.278 |
| 107.291 |  | Hose connection adaptor with 1 air outlet for Ø 60 mm hose. Push-fit on air outlet |
| 107.292 |  | Hose connection adaptor with 2 air outlets for Ø 38 mm hose. Push-fit on air outlet |
| 107.278 |  | Hose connection adaptor, Push-fit on air outlet |
| 110.895 |  | Stainless steel filter push-fit on air intaker |
| 125.907 125.908 |  | Blow-off nozzle, push-fit Outlet opening adjustable 1 - 5.5 mm a = 300 mm a = 482.6 mm Connector Ø 60 mm |

Blowers

Special nozzles on request

If using non-Leister blowers or accessories, Leister does not provide any warranty for its products.