


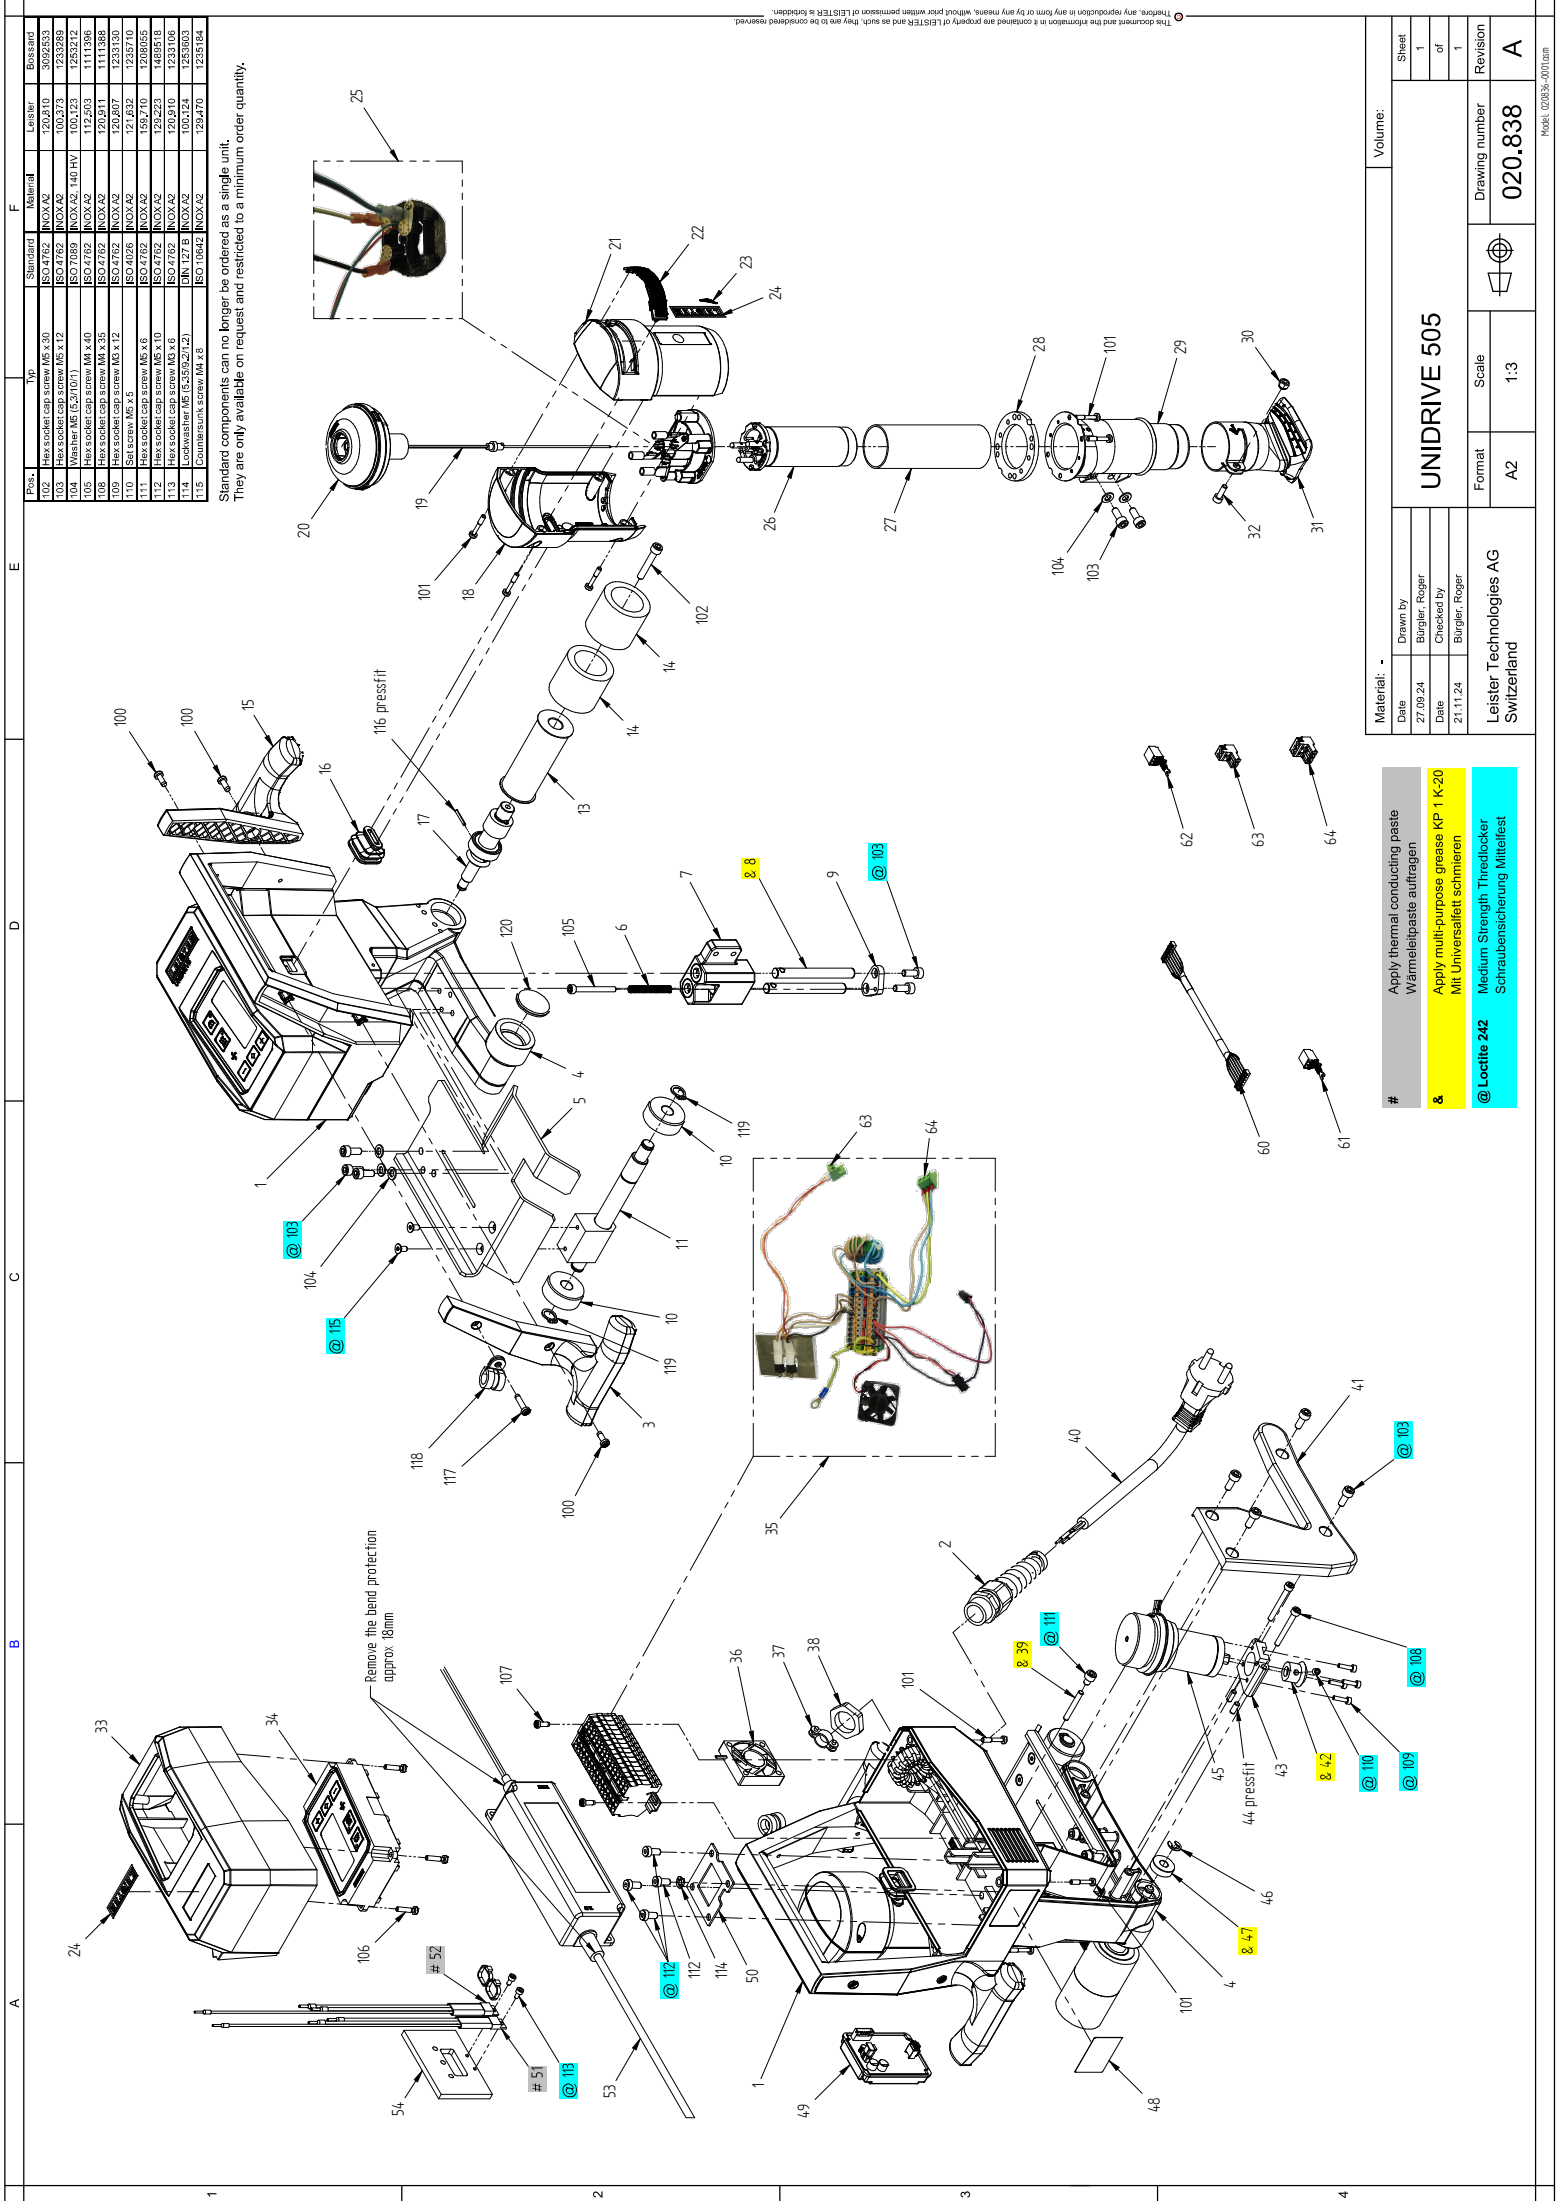

Pos.	Typ	Standard	Material	Leister	Bossard
102	Hex socket cap screw M5 x 3,0	ISO 4762	NOX-A2	120.610	3092533
103	Hex socket cap screw M5 x 1,2	ISO 4762	NOX-A2	100.373	1233289
104	Washer M5 (5,3/10,1)	ISO 7089	NOX-A2, 140 HV	100.123	1233212
105	Hex socket cap screw M4 x 4,0	ISO 4762	NOX-A2	112.503	1111398
106	Hex socket cap screw M4 x 3,5	ISO 4762	NOX-A2	120.911	1233130
107	Hex socket cap screw M3 x 1,2	ISO 4762	NOX-A2	120.907	1233130
108	Hex socket cap screw M3 x 1,2	ISO 4762	NOX-A2	120.907	1233130
109	Hex socket cap screw M3 x 1,2	ISO 4762	NOX-A2	120.907	1233130
110	Hex socket cap screw M3 x 1,2	ISO 4762	NOX-A2	120.907	1233130
111	Hex socket cap screw M3 x 1,2	ISO 4762	NOX-A2	120.907	1233130
112	Hex socket cap screw M3 x 1,2	ISO 4762	NOX-A2	120.907	1233130
113	Hex socket cap screw M3 x 1,2	ISO 4762	NOX-A2	120.907	1233130
114	Hex socket cap screw M3 x 1,2	ISO 4762	NOX-A2	120.907	1233130
115	Lockwasher M5 (5,3/5,2/2,1)	ISO 127 B	NOX-A2	100.124	1233603
116	Counterbore screw M4 x 8	ISO 10642	NOX-A2	129.470	1235164

Standard components can no longer be ordered as a single unit.
They are only available on request and restricted to a minimum order quantity.

Material: -		Volume:	
Date	Drawn by	UNIDRIVE 505	
27.09.24	Bürger, Roger		
Date	Checked by		
21.11.24	Bürger, Roger	Drawing number	
Leister Technologies AG		Format	Revision
Switzerland		A2	A
		Scale	020.838
		1:3	

- # Apply thermal conducting paste
Wärmeleitpaste auftragen
- 8 Apply multi-purpose grease KP 1 K-20
Mit Universalfett schmieren
- @ Loctite 242 Medium Strength Threadlocker
Schraubensicherung Mittlest