


Hand-Extruder WELDPLAST S2 PVC

A new era in PVC welding





LEISTER

A milestone in PVC welding.

The new WELDPLAST S2 for PVC is a masterpiece of modern technology. Its external appearance fulfils the highest requirements of functionality and design, while internally all the needs of the material to be worked are met. It even welds PVC-U without any difficulty. Its laboratory-tested strength values have reached their highest-ever quality. The experiences of users and developers were given equal weight in the design of the new device. The result is a hand extruder which impresses not only with the quality of its work, but also with its ergonomic appearance.

Digitally controlled hand extruder WELDPLAST S2 PVC

A screw specially designed for PVC was developed as the centrepiece of the new hand extruder. With this and the other countless technical advances, the WELDPLAST S2 PVC is a device which is convincing in every situation.



Leister stands for reliability and durability.

Voltage	V~	230
Power rating	W	3000
Frequency	Hz	50/60
Material		PVC-U, HD-PE, LD-PE, PP
		(other materials on enquiry)
Welding rod \varnothing	mm	3/4
Output Ø 4 mm	kg/h	PVC-U: 1.5-2.7 PE: 1.0-2.3 PP: 0.9-2.
Output Ø 3 mm	kg/h	PVC-U: 0.9-1.7 PE: 0.6-1.3 PP: 0.5-1.1
Dimensions L x W x H	mm	$450 \times 98 \times 260$ (without welding shoe)
Weight		kg 5.8 (without power cable)
Conformity mark		CE
Type of certification		CCA
Protection class I		(1)

Article number WELDPLAST S2, 230V, Euro plug:	
DVC version for DVC II HD DE LD DE DD	

PVC Version for PVC-U, HD-PE, LD-PE, PP	135.724
Standard version for HD-PE, LD-PE, PP	127.215

Changes to the technical data remain reserved.



Despite its small size, the compact device produces up to 2.7kg of extrudate an hour.



The perfect blend of functionality and design: the new WELDPLAST S2 PVC.





The WELDPLAST S2 PVC is always within reach on its practical stand.

Everything can be neatly stored away in the useful Leister case (included in delivery).



Multifunctional display



Continously variable pivoting handle



Maintenance-free blower



Double-sided, non-twisting wire feed



Hot air casing as heat protection



Easily adjustable air duct for all welding positions



Quiet, powerful drive



Extruder screw ideal for PVC

WELDPLAST S2 PVC Accessories

		,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,
A B	131.451	Tool rest
U O	119.159 119.161 119.163	Complete welding shoe, fillet weld 5/6 mm 8/10 mm 15 mm
	119.193 119.194 119.195 119.196	Complete welding shoe, V/X seam V-seam 5/6 und X-seam 10/12 mm V-seam 8/10 und X-seam 15/20 mm V-seam 12 und X-seam 25 mm V-seam 15 und X-seam 30 mm

We have many other types of welding shoes, just ask us about them!




Headquarters:

Leister Process Technologies Galileo-Strasse 10 6056 Kaeqiswil/Switzerland

phone: +41 41 662 74 74 fax: +41 41 662 74 16 leister@leister.com

www.leister.com

Specifications are subject to change without prior notice

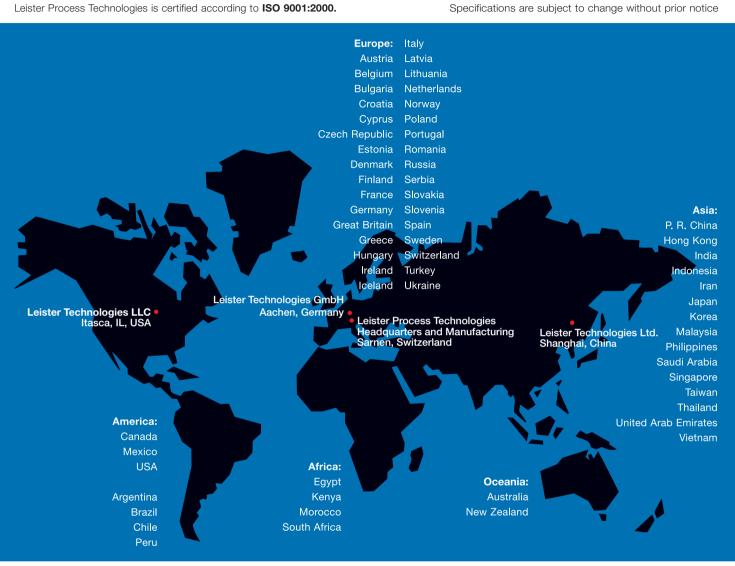

Our close worldwide network of more than 120 Sales and Service Centres in more than 60 countries.

© Copyright by Leister